



EZEE BOND®

Professional In Tiling Solutions



CM/L - 8700144715

- Tile Adhesive
- Epoxy Grout
- Tile Grout
- Grout Admixture
- Tile Cleaner



S B PETRO CHEMICALS

(An ISO 9001-2015 Certified Company)

POLYMER BASE-2055

EZEE BOND 2055 polymer modified adhesive for installation of small to medium format ceramic vitrified wall and floor tiles in interior areas.

Advantages : Ideal for fixing ceramic, vitrified tiles, for interior Floor & Wall

Applications : Designed for internal floor and wall applications.

Coverage : Approximately 35-40 sq. ft. per 20 kg bag.

Packing : 20 Kg

Colour : Grey, White

Certification : ISI: type 1 adhesive



HIGH POLYMER BASE-3055

EZEE BOND 3055 is high polymer modified thin set adhesive for exterior wall, Floor and low height elevation installation of ceramic, vitrified tiles when mixed with water it has a convenient open time and high adhesion and workability.

Application : Designed for Exterior Tiling Areas

Advantage : Superior bond, single component

Packaging : 20 Kg

Colour : Grey and White

Coverage : Approximately 35-40 sq. ft. per 20 kg bag for a bed of 3mm.

Certification : ISI: type 2 adhesive



HIGH POLYMER BASE -3055 ZIG ZAG

EZEE BOND 3055 ZIG ZAG Tile Adhesive is a Polymer Modified adhesive for the installation of small and medium format Ceramic and Vitrified tiles on walls and floors in the exterior areas. Exceeds type 3 Indian Standard, EN, and ANSI Standard Adhesive is a very good mixture of Cement, Polymer Natural Mineral.

Packaging: 20 Kg

Colour: Grey and White

Coverage: Approximately 25-30 sq. ft. per 20 kg bag for a bed of 3mm.

Certification: ISI: type 3 adhesive



HIGH POLYMER BASE -4055(PLATINUM GOLD)

A wonderful mixture of cement, silica and different polymers for installation of ceramic, vitrified tiles, stones, It is flexible to handle structural movement and can take on extreme weather conditions. When mixed with water it has long open time with unsurpassed adhesion and workability. It is also use for large tiles size and stone.

Applications : for exterior High Height Elevation and under water application.

Ensure surface is free from any loose particle and strong enough to hold tile.

Advantage : It can be used on various surface drive wall directly, under water application single component with ultimate bond strength. Single pack just mix with water.

Coverage : Approximately 35 -40 sq. ft. per 20 kg bag bed of 3mm.

Packaging : 20 Kg

Colour : Grey and White


Certification : ISI Type 2



ADHESIVE ADMIX AD-1

ADMIX AD – 1 for adhesive improves tile adhesive performance. This latex ingredient improves adhesive bonding, flexibility, and moisture and temperature resistance. It works in high- performance applications, including heavy traffic and water-exposed tiles. The admix strengthens tile-substrate bonds, making the installation more durable.

Packaging: 1LTR, 5LTR

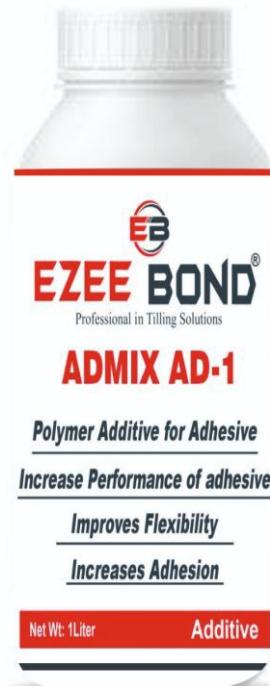

POLYMER BASED TILE GROUT

EZEE BOND Polymer Based Grout is one Component water proof Grout is ideal for Attting & Finishing of Tiles, Marble and Stone's joints in Interior and Exterior for both Floor and Walls, Grouting of joint treatment with Resistant water type joint.

Special Features : High performance grout, Excellent water-Resistance, Natural Antibacterial Designed for grouting Wall & Floor Tiles, Granites, Marbles & Stones Etc. Extra Ane Anish, high resistance to sunlight, easy to clean.

Coverage : Varies with tile size and grout.

Colors : Available in a range of more than 30 colors

Packing : 1 Kg



GROUT ADMIXTURE

EZEE BOND Grout Admixture is polymer modified with other chemical to produce liquid Admixture. Which when mixed with sanded and unsanded grout gives high strength non porous grouts. Which exceeds strength of normal grout and makes grout water repellent flexible & non porous.

Applications : It improves the performance of cement grout.

Advantages : Colour fast, flexible , Compressive strength, shock and chemical resistant reduced water absorption, Easy to clean.

Packaging : 100 ml , 300 ml, 500ml, 5 ltr., 30 ltr.,

Coverage : Varies by application



EPOXY GROUT

It is specially formulated to give high strength stain free chemical resistance joint filler for wall floor tiles also for stones. It consist of three part resin, hardener & filler. It is recommended for industrial and commercial applications, food processing unit, commercial kitchens, packing plants.

Applications : Industrial food processing plants, beverage plants, battery plants and environments requiring high temperature and chemical resistance.

Advantages : Heavy duty industrial grout, Superior chemical & heat resistance, water cleanable & fast curing , highly resistant to bacteria attack.

Packaging

Net Weight : 1 kg & 5 kg

Also Available in Two Component



RAPID TILE CLEANER

Cutfast is a powerful heavy duty cleaner for ceramic tiled doors and walls. It removes tough stains and other type of stains. It can be used for daily maintenance also suitable for cleaning effectively and easy to use.

Application : Interior & Exterior areas, Kitchens, Bathroom, Counter Tops

Advantages :

- Fast acting
- Non-corrosive
- Easy to use
- Economical

Packing : 500ml, 1ltr.

Coverage : 15-50 sqft. per litre depending on porosity of the surface.



S B PETRO CHEMICALS

(An ISO 9001-2015 Certified Company)

Plot No. 21-A, Rajender Nagar, Industrial Area, Mohan Nagar, Ghaziabad-201007

Contact No.: 8010625901, 9953625901

Customer Care- 1800-8900-851